



FIBER OPTIC GYROSCOPES



www.memsmag.com

GF50-A/B/C TACTICAL GRADE

Single Axis Fiber Optic Gyroscope



Zero Bias Stability	0.1~0.3°/hr(1 σ ,10s)
Zero Bias Repeatability	0.1~0.3°/hr(1 σ)
Full Temperature Zero Bias Repeatability	0.3~1°/hr(1 σ)
Random Walk Coefficient	0.01~0.02 °/√h
The Scale Factor of Nonlinearity.....	50~100ppm (1 σ)
The Scale Factor of Repeatability.....	50~100ppm (1 σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.1°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ50*36.5mm
Weight.....	130g



GF60-A/B/C

TACTICAL GRADE

Single Axis Fiber Optic Gyroscope



Zero Bias Stability	0.05~0.2°/hr(1 σ ,10s)
Zero Bias Repeatability	0.05~0.2°/hr(1 σ)
Full Temperature Zero Bias Repeatability	0.3~1°/hr(1 σ)
Random Walk Coefficient	0.005~0.02 °/√h
The Scale Factor of Nonlinearity.....	50~100ppm (1 σ)
The Scale Factor of Repeatability.....	50~100ppm (1 σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.1°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ60*29.5mm
Weight.....	150g



GF70ZK-A/B TACTICAL GRADE

Single Axis Fiber Optic Gyroscope



Zero Bias Stability	0.03~0.05°/hr(1σ, 10s)
Zero Bias Repeatability	0.02°/hr(1σ)
Random Walk Coefficient	0.003~0.005 °/√h
The Scale Factor of Nonlinearity	10ppm (1σ)
The Scale Factor of Repeatability	10~20ppm (1σ)
Full Temperature Scale Factor of Repeatability	200~300ppm(1σ)
Dynamic Range	±500°/s
Magnetic Field Sensitivity	0.02°/hr/Gs
Vibration Conditions	4.2g, 20~2000Hz
Size	Φ70*32mm
Weight	250g

GF80-A/B

TACTICAL GRADE

Single Axis Fiber Optic Gyroscope



Zero Bias Stability	0.01~0.02°/hr(1 σ , 10s)
Zero Bias Repeatability	0.01~0.02°/hr(1 σ)
Random Walk Coefficient	0.005 °/√h
The Scale Factor of Nonlinearity.....	10ppm (1 σ)
The Scale Factor of Repeatability.....	10~20ppm (1 σ)
Full Temperature Scale Factor of Repeatability	100~150ppm(1 σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.02°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ80*33mm
Weight.....	350g



GF98H-A/B/C/D TACTICAL GRADE

Single Axis Fiber Optic Gyroscope



Zero Bias Stability	0.01~0.015°/hr(1 σ ,10s)
Zero Bias Repeatability	0.01~0.015°/hr(1 σ)
Random Walk Coefficient	0.001~0.002 °/√h
The Scale Factor of Nonlinearity	10ppm (1 σ)
The Scale Factor of Repeatability	10~20ppm (1 σ)
Full Temperature Scale Factor of Repeatability	50~200ppm(1 σ)
Dynamic Range	±500°/s
Magnetic Field Sensitivity	0.02°/hr/Gs
Vibration Conditions	4.2g, 5~500Hz
Size	Φ98*35mm
Weight	540g

GF120H-A/B/C

NAVIGATION GRADE

Single Axis Fiber Optic Gyroscope



Zero Bias Stability	0.006~0.01°/hr(1σ, 10s)
Zero Bias Repeatability	0.002~0.004°/hr(1σ)
Random Walk Coefficient	0.001~0.002 °/√h
The Scale Factor of Nonlinearity	10ppm (1σ)
The Scale Factor of Repeatability	10ppm (1σ)
Full Temperature Scale Factor of Repeatability	50~100ppm(1σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.02°/hr/Gs
Vibration Conditions.....	4.2g, 20~500Hz
Size.....	Φ120*38mm
Weight.....	850g

GF2X64-A/B TACTICAL GRADE

Dual Axis Fiber Optic Gyroscope



Zero Bias Stability	0.5~1.0°/hr(1σ, 10s)
Zero Bias Repeatability	0.5~1.0°/hr(1σ)
Full Temperature Zero Bias Repeatability	0.5~1.0°/hr(1σ)
Random Walk Coefficient	0.05 °/√h
The Scale Factor of Nonlinearity.....	30~50ppm (1σ)
The Scale Factor of Repeatability.....	50~100ppm (1σ)
Dynamic Range.....	±400°/s
Magnetic Field Sensitivity.....	0.2~0.5°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	64*60*42mm
Weight.....	300g

GF2X70-A/B

TACTICAL GRADE

Dual Axis Fiber Optic Gyroscope



Zero Bias Stability	0.1~0.2°/hr(1σ, 10s)
Zero Bias Repeatability	0.1~0.2°/h(1σ)
Full Temperature Zero Bias Repeatability	0.1~0.5°/hr(1σ)
Random Walk Coefficient	0.02 °/√h
The Scale Factor of Nonlinearity.....	20~50ppm (1σ)
The Scale Factor of Repeatability.....	20~50ppm (1σ)
Dynamic Range.....	±400°/s
Magnetic Field Sensitivity.....	0.2~0.5°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	70*70*43mm
Weight.....	360g





GF3G70-A/B/C TACTICAL GRADE


Tri Axis Fiber Optic Gyroscope

Zero Bias Stability	0.02~0.05°/hr(1σ, 10s)
Zero Bias Repeatability	0.03~0.05°/hr(1σ)
Threshold.....	0.01 °/√h
The Scale Factor of Nonlinearity.....	20ppm (1σ)
The Scale Factor of Repeatability.....	20ppm (1σ)
Full Temperature Scale Factor of Repeatability	1000ppm(1σ)
Dynamic Range.....	±300°/s
Magnetic Field Sensitivity.....	0.005°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ70*60mm
Weight.....	800g

GF3G75

NAVIGATION GRADE

Tri Axis Fiber Optic Gyroscope

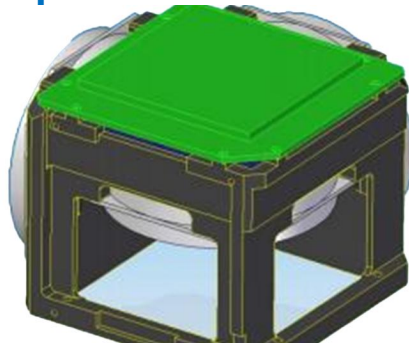

Zero Bias Stability	0.01°/hr(1 σ , 10s)
Zero Bias Repeatability	0.01°/hr(1 σ)
Threshold.....	0.001 °/√h
The Scale Factor of Nonlinearity.....	5ppm (1 σ)
The Scale Factor of Repeatability.....	15ppm (1 σ)
Full Temperature Scale Factor of Repeatability	<50ppm
Dynamic Range.....	±600°/s
Magnetic Field Sensitivity.....	0.02°/hr/Gs
Vibration Conditions.....	6.06grms, 20~2000Hz
Size.....	98*98*80mm
Weight.....	900g



GF3G90-A/B/C TACTICAL GRADE

Tri Axis Fiber Optic Gyroscope



Zero Bias Stability	0.006~0.015°/hr(1σ, 10s)
Zero Bias Repeatability	0.003°/hr(1σ)
Threshold.....	0.01 °/√h
The Scale Factor of Nonlinearity.....	10 ppm(1σ)
The Scale Factor of Repeatability.....	10ppm (1σ)
Full Temperature Scale Factor of Repeatability	1000ppm(1σ)
Dynamic Range.....	±300°/s
Magnetic Field Sensitivity.....	0.005°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ90*20mm
Weight.....	1300g

GF3X35

TACTICAL GRADE

Tri-Axis Fiber Optic Gyroscope



Zero Bias Stability	0.3°/hr(1σ,10s)
Zero Bias Repeatability	0.3°/hr(1σ)
Full Temperature Scale Factor of Repeatability	200ppm(1σ)
Threshold.....	0.5 °/√h
The Scale Factor of Nonlinearity.....	50ppm (1σ)
The Scale Factor of Repeatability.....	50ppm (1σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.1°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	55*50*56mm
Weight.....	270g

GF3X70-A/B/C TACTICAL GRADE

Tri Axis Fiber Optic Gyroscope



Zero Bias Stability	0.1~0.15°/hr(1 σ , 10s)
Zero Bias Repeatability	0.03~0.05°/hr(1 σ)
Threshold.....	0.01 °/√h
The Scale Factor of Nonlinearity.....	20 (1 σ)
The Scale Factor of Repeatability.....	20ppm (1 σ)
Full Temperature Scale Factor of Repeatability	1000ppm(1 σ)
Dynamic Range.....	±300°/s
Magnetic Field Sensitivity.....	0.005°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ70*60mm
Weight.....	800g

GF3X80-H/M

TACTICAL GRADE

Tri-Axis Fiber Optic Gyroscope



Zero Bias Stability	0.3~0.5°/hr(1 σ ,10s)
Zero Bias Repeatability	0.3~0.5°/hr(1 σ)
Threshold.....	0.5 °/√h
The Scale Factor of Nonlinearity.....	20~30ppm (1 σ)
The Scale Factor of Repeatability.....	30~50ppm (1 σ)
Full Temperature Scale Factor of Repeatability	1000ppm(1 σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.1°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ80*70mm
Weight.....	680g



GF3X90-H/M NAVIGATION GRADE

Tri Axis Fiber Optic Gyroscope



Zero Bias Stability	0.1~0.2°/hr(1σ, 10s)
Zero Bias Repeatability	0.1~0.2°/hr(1σ)
Threshold.....	0.2 °/√h
The Scale Factor of Nonlinearity.....	30~50ppm (1σ)
The Scale Factor of Repeatability.....	30~50ppm (1σ)
Full Temperature Scale Factor of Repeatability	1000ppm(1σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.005°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ90*70mm
Weight.....	780g

GF3X100-H/M TACTICAL GRADE

Tri Axis Fiber Optic Gyroscope



Zero Bias Stability	0.05~0.1°/hr(1σ,10s)
Zero Bias Repeatability	0.05~0.1°/hr(1σ)
Threshold.....	0.1 °/√h
The Scale Factor of Nonlinearity.....	20ppm (1σ)
The Scale Factor of Repeatability.....	30ppm (1σ)
Full Temperature Scale Factor of Repeatability	1000ppm(1σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.1°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ100*95mm
Weight.....	950g



GF3X112-A/B/C NAVIGATION GRADE

Tri Axis Fiber Optic Gyroscope



Zero Bias Stability	0.05~0.2°/hr(1 σ , 10s)
Zero Bias Repeatability	0.05~0.2°/hr(1 σ)
Threshold.....	0.5 °/√h
The Scale Factor of Nonlinearity.....	20~50ppm (1 σ)
The Scale Factor of Repeatability.....	20~50ppm (1 σ)
Full Temperature Scale Factor of Repeatability	1000ppm(1 σ)
Dynamic Range.....	±500°/s
Magnetic Field Sensitivity.....	0.01°/hr/Gs
Vibration Conditions.....	4.2g, 20~2000Hz
Size.....	Φ112*100mm
Weight.....	450g



The Leader in China Inertial Sensor Market



Unmanned Aerial
Vehicles




Satellites



Autonomous Vehicles



Remotely Operated
Underwater Vehicles

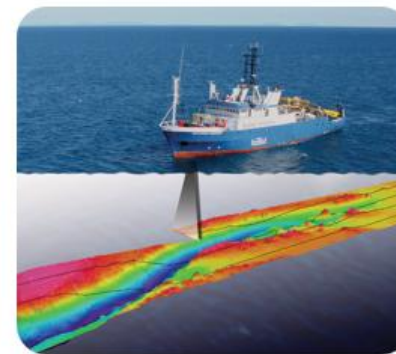

Maritime Echosounder
Application



Petroleum Extraction
and Exploration